

Web Setup manual

Get start with Web Setup	2
Features	4
Setup/Quick Setup/Tuner Preset	4
Store/Recall	4
Backup and upload configurations	4
Factory Reset	4
Status information + Control	4
Print Current configuration	4
Change login password	4
Screen	5
Navigation bar	5
Setup contents	5
radio button	5
button	6
select box	6
textbox	6
slider	7
tab	7
status dialog	8
additional menu sidebar	8
Others	9
Loading screen	9
Alert	9
Lock screen	9
Error screens	10
Networking error	10
About keyboard operation	10
Limitation	10
Supported browsers	10
Language	10
browser's plugins	10
browser zoom feature	10

Get start with Web Setup

Web Setup is an application for configuring and managing products.
To start Web Setup, please follow the steps below.

1. Connect your PC or smart device terminal (hereinafter this is called "device") to the LAN (no internet required)
2. Connect your device to your LAN (no internet required)
3. Check the **IP address** of the device.
You can confirm it by following ways,
 - Press the **Information button** or the **Display button** repeatedly. (Diagram A)
 - Using the "Onkyo Controller" app. (Diagram B)
 - Open Setup and confirm Network > IP Address. (Diagram C)

Diagram A

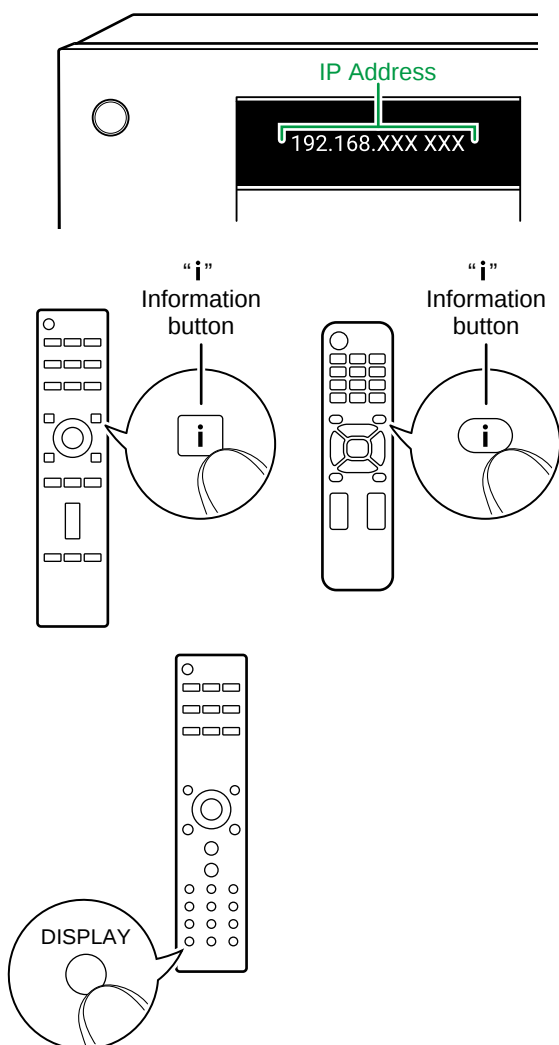


Diagram B



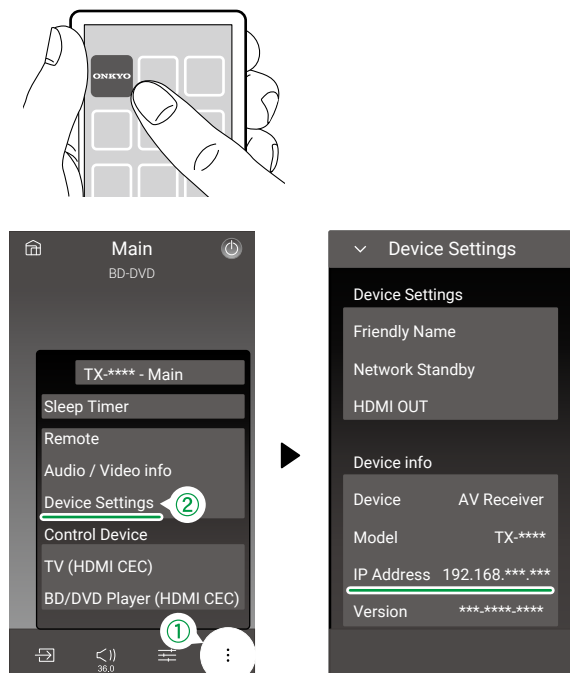


Diagram C

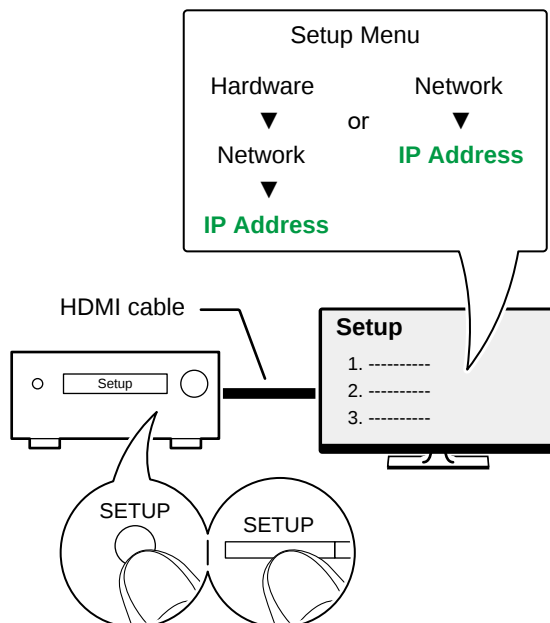

4. Open a browser on your device and enter the URL `http://(IP Address of device).` (* 1)

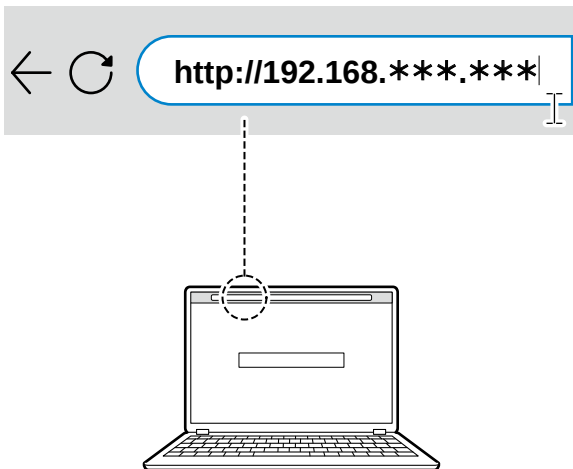

5. When the authentication screen for login appears `ciuser`, enter the user name = **ciuser** and password = **ciuser**. (* 2)

Sign in

`http://192.168.***.***` requires a username and password. Your connection to this site is not private

Username

Password

Hint

(* 1)

See [here](#) for supported browsers.

(* 2)

You can change the password. See [here](#).

Features

Setup/Quick Setup/Tuner Preset

Setup/Quick Setup are same features as the on-screen display (OSD) one. Tuner Preset is same feature as remote-control or panel key operation.

Store/Recall

These are same features as Store/Recall of the device.

Backup and upload configurations

Backup Configuration to File downloads the device configurations to the terminal. Upload Configuration from File is the reverse operation of Backup ... and uploads configurations file from the terminal to the device.

Factory Reset

This is same feature as Factory Reset of the device.

Status information + Control

Web Setup can display current status of following information's,

Zone

- Power
- Volume
- Selector
- Mute

12V Trigger

Amp information's

- Protect
- Temperature
- FAN Speed

Audio information(except Output Sampling Freq.)

Video information

Only power is controllable.

GUI is [here](#).

Print Current configuration

Web Setup can display data optimized for printing layout.

TX-****			
Firmware Version:R000-0000-0000			
Input / Output Assing			
TV Out / OSD		HDMI 4K / 8K Signal Format	
HDMI Out	MAIN	BD/DVD	4K Enhanced
Dolby vision	---	GAME	4K Enhanced
Upscaling	Off	CBL/SAT	4K Enhanced
Super Resolution	---	STRM BOX	4K Enhanced
Zone2 HDMI	Not Use	PC	4K Enhanced
OSD language	English	CD	---
Impose OSD	On	TV	---
Mini Player OSD	Always On	PHONO	---
Screen Saver	3 minutes		
HDMI Input		Video Input	
BD/DVD	HDMI 1 (HDCP2.3)	BD/DVD	COMPONENT
GAME	HDMI 2 (HDCP2.3)	GAME	---
CBL/SAT	HDMI 3 (HDCP2.3)	CBL/SAT	VIDEO 2
STRM BOX	HDMI 4 (HDCP2.3)	STRM BOX	VIDEO 1

Change login password

You can change your password from the additional menu > Change Password The following characters cannot be used.



- space
- Non-ASCII characters

After changing the password, you will need to reload Web Setup.

Screen


The screen consists of the following drawing areas.

- header
- Navigation bar
- Setup contents
- Additional menu side bar

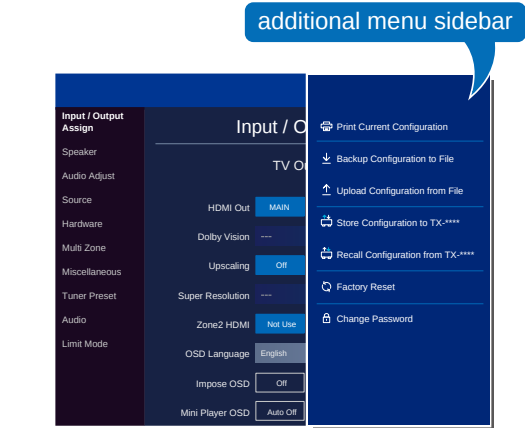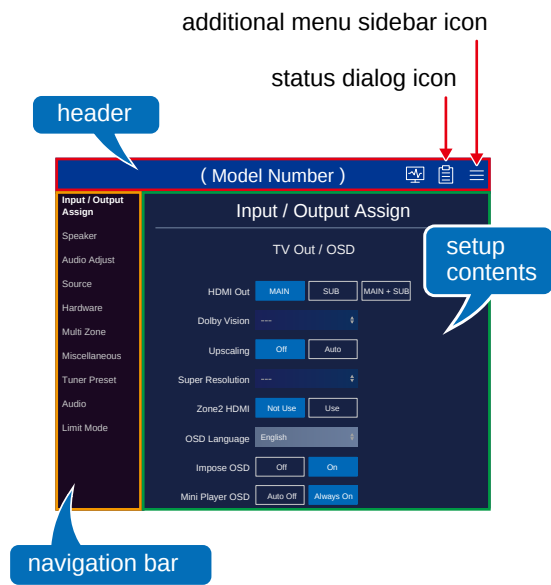

Navigation bar

This is navigation menu for setup contents. Sub menu is shown when hover mouse cursor on Main menu. Click an menu to jump to that item.

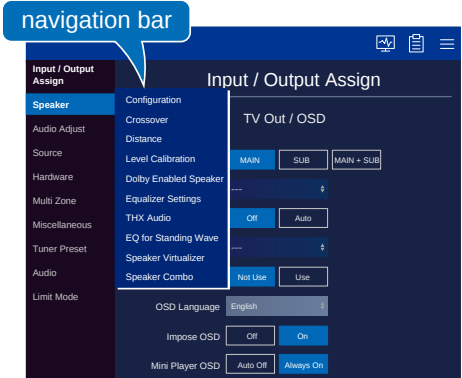

Setup contents

You can change the setup contents from the GUI control.

- radio button
- button
- select box
- textbox
- slider
- tab

radio button


This is a screenshot of a radio button.



This is similar to a standard HTML radio button. Web Setup will the current settings grayed out if the item cannot be changed.

button


This is a screenshot of the button.

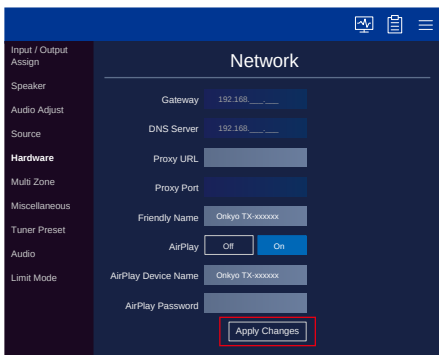

This is similar to a standard HTML button.

select box


This is a screenshot of the select box.

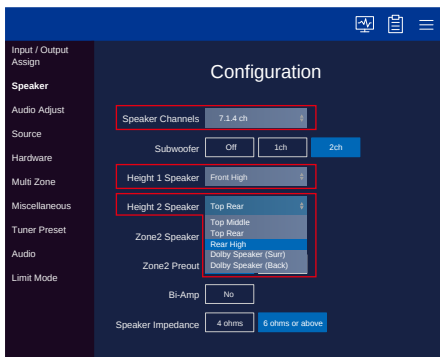


This is similar to a standard HTML select box.

textbox

This is a screenshot of the textbox.

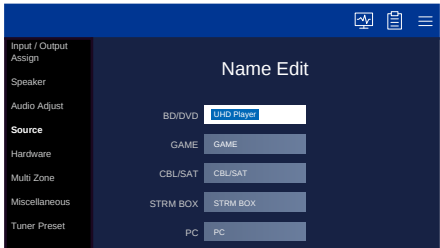

This is similar to a standard HTML select box. Web Setup display error dialog when inputing text of non- ASCII characters.

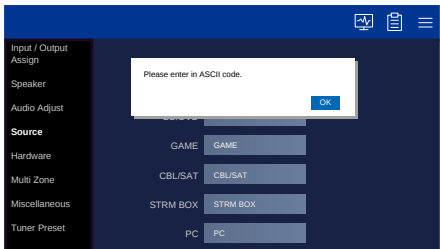

slider

- Slider is made of following components,
- bar
 - knob
 - label
 - value display area
 - Non-numeric checkbox(ex. Last, Off)

Slider has following designs,

design: normal
example:




design: zero centered, signed value
example:



note: The bar is drawn side to side around zero.

design: including additional values
example:

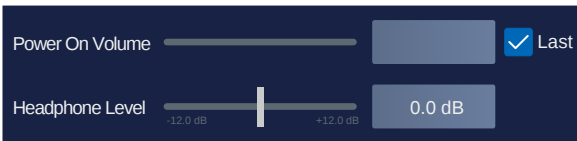

note: The bar is not available when the box checked

Here are operations of the slider.

operation	result
drag and drop the knob	set the value of knob's position
click on bar area to the right or left of the knob(*1)	left -> -1 step, right -> +1 step
press left/right cursor key when slider in focus(*1,*2)	left -> -1 step, right -> +1 step

- (*1) Press and hold the key to repeat.
(*2) Press TAB key or click the bar to focus.

The number of steps is dependent on setup menu.
This may be dependent on other settings(ex. Tuner Frequency Step)

--- is displayed on value area when slider is not available.

Tap operation of smart devices is same as click operation.


Tips

If you have difficulty setting the value near the maximum or minimum limit, please try the following steps:

1. Set Max or Min value.
2. Click the bar area to the left or right of the knob to adjust.

tab

This is a screenshot of the tab.

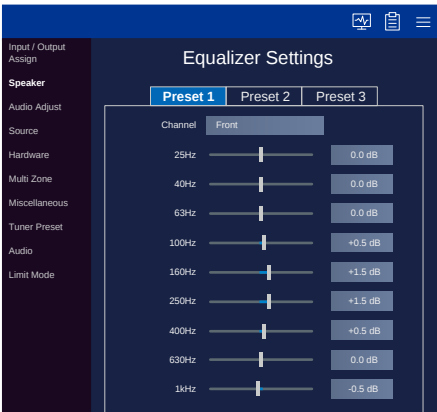


This is similar to the tab control on Windows GUI.

Note


Unlike PC-Setup, changing to each settings are applied immediately without moving tabs.

status dialog

This is a screenshot of the status dialog.

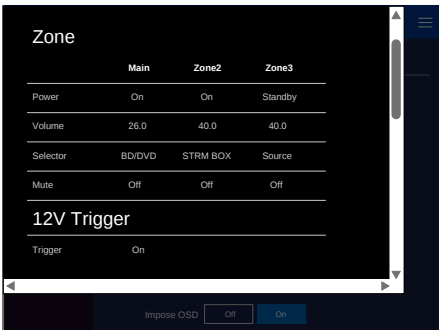


Only power can be controlled.
Power status is toggled when mouse hover and click.

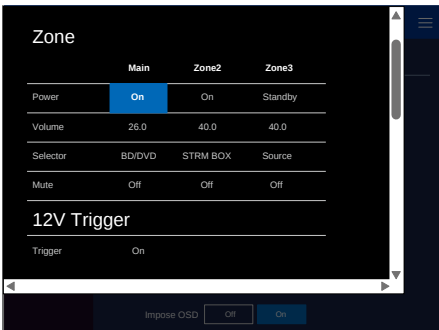

additional menu sidebar

This is a screenshot of the additional menu sidebar.

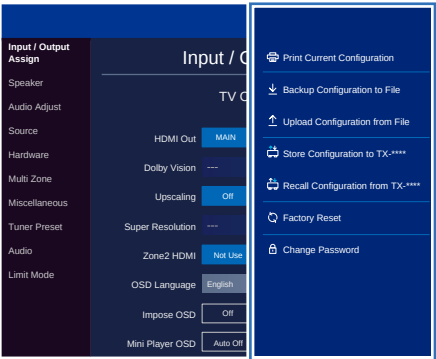

menu	feature
Print Current configuration	Print Current configuration
Backup configuration to File	Backup configurations
Upload configuration from File	Upload configurations
Store configuration to (Device)	Same feature as Store of the device.
Recall configuration from (Device)	Same feature as Recall of the device.
Factory Reset	Same feature as Factory Reset of the device.
Change Password(*2)	Change login password


(*2)AV Receiver model only.

Others

Loading screen

Web Setup needs to load the device settings when the page loads.


This is screenshot of loading screen.

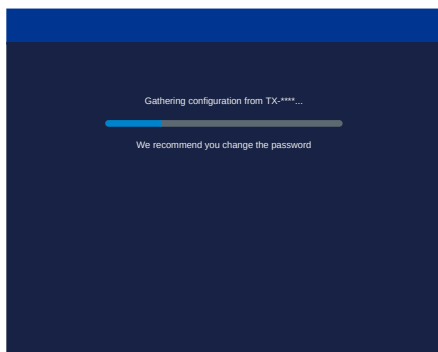

Alert

Alert dialog is displayed for warning of operations.

The following warning screen is displayed when attempting to enter standby mode with the Network Standby setting set to Off.

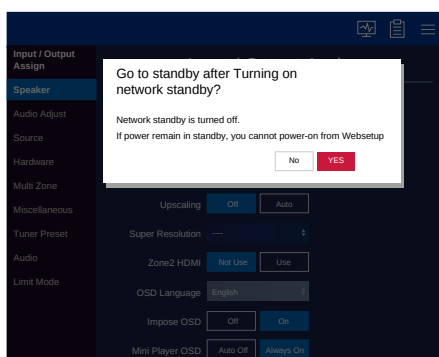

Alert screen has buttons to confirm to continue or cancel the operation.

Lock screen


The screen of Web Setup is locked in the following situations.

- Main zone is in standby
- Miscellaneous > Lock > Setup = Locked
- After applying network settings
- After running Factory Reset
- After running Recall
- After uploading settings
- Initial Setup/Speaker measurement(e.g. AccuEQ)

This is screenshot of the lock screen.


If unlockable, an unlock button will appear.

Web Setup is redrawn and available when screen is unlocked.

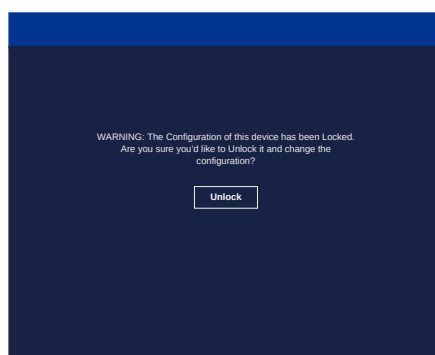

If unlocking is not possible, a screen prompting you to reload manually will be displayed.


If the URL changes, such as when the network is changed, a guide to reload page will be displayed.

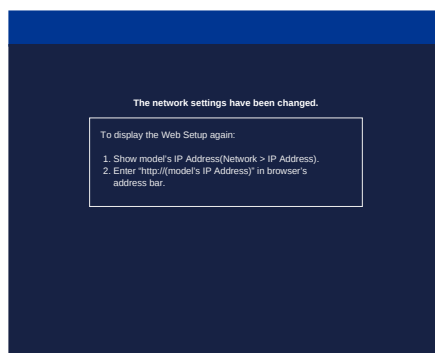

Error screens

Networking error

This screen is displayed when websetup meet unrecordable networking errors.
(ex. LAN cable is unplugged, Network is down, etc...)

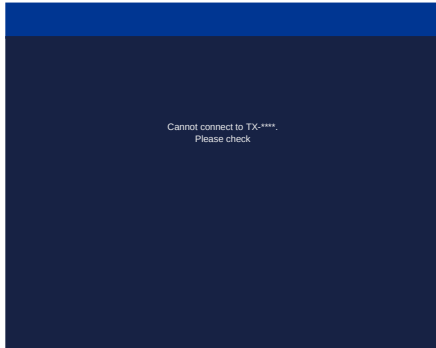

About keyboard operation

Web Setup supports basic keyboard operations, but it is browser-dependent and does not fully support it.

Limitation

Supported browsers

- Google Chrome
- Safari

Language

English only

browser's plugins

Web Setup does not support browser's plugins.

browser zoom feature

Web Setup supports only 100%.